



SPECIFICATIONS

Voltage Booster


Primary Voltage Input 105,115,195,208

Secondary Voltage Output 115/230

60 Cycles Phase 1

Weight 72 lbs.

Dimensions 14" x 11" x 13-1/2"

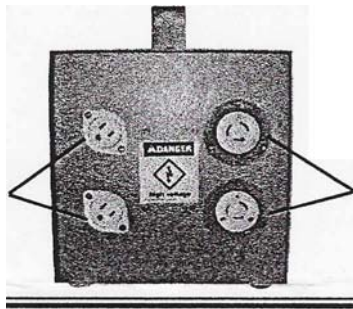

(2) 115V Outputs

(2) 230V Outputs

The LEC-60PB Voltage Booster gives full voltage with the rapid selector switch on the following combinations.

Input 115V boosted to output of 115V and 230V

Input 105V boosted to output of 115V and 230V

Input 195V boosted to output of 115V and 230V

Input 208V boosted to output of 115V and 230V

The LEC-60PB Voltage Booster is a simple means of supplying you with the proper voltage regardless of low voltage input. Proper voltage will assure top performance and protection for all of your valuable machinery.

SPECIAL FEATURES

Everyone who has ever experienced low voltage conditions when operating electrically driven equipment knows what damage can be done and how much time is lost by an insufficient, ineffective power supply. The LEC-60PB voltage transformer corrects low voltage conditions and assures a full voltage for top performance equipment up to and including eight horsepower.

* For example, where power at the meter or long lead-ins indicate only 105, 115, 195 or 208 volts, all that is necessary is to connect the lead in plug and place the selector switch at the incoming current.

Through the use of this voltage booster, the low voltage is boosted to a full 115V or 230V so that your machine runs cool and much more efficiently. Furthermore, it is not necessary to make a special hookup for either of the voltages. The two plugs, one indicating 115V and the other 230V are readily available to match the voltage of your motor. The only precaution necessary is to establish your low voltage condition definitely by the simple use of the meter on the unit. The booster is very simple and easy to operate. All that is necessary is to hook in on your regular power source and check the voltage input.

The LEC-60PB Voltage Booster is a very compact instrument that will be worth its weight in gold to you in saving time and saving your machinery. It is attractively cased with a carrying handle and is air-cooled. It will efficiently operate one sander, edger and buffer.

*Denotes Peak Horsepower Ratings. Continuous HP rating up to 5 HP.

Latta Equipment Company, Inc. – 330 East Hebron Street, Suite J – Charlotte, NC 28273
 www.WorkDustFree.com - 704-752-7944 - 704-414-6811 Fax