


ERGOMAT® 100

Economical polyurethane anti-fatigue matting for moderate duty applications.

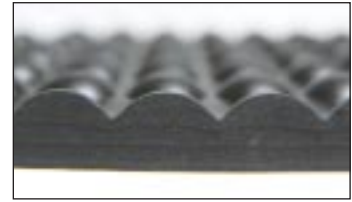

▶ **Chemical resistance:**

- Very good.*
- We will provide samples for chemical resistance testing with specific chemicals used in your facility.

▶ **Cleaning:**

- Sweep or vacuum as appropriate. The ERGOMAT 100 may be hosed down or easily washed with a string mop if necessary.

▶ **Weight:**

- 1 pound per square foot

▶ **Raw material:**

- Polyurethane – freon free.

▶ **Thickness:**

- 5/8"

▶ **Temperature range:**

- Constant: 32°F to 175°F
- Briefly: 250°F

▶ **Optional Equipment:**

- Non-slip backing for dry, polished floors or carpet

* *Contact Latta LLC for details.*

▶ **Primary usage areas:**

All dry, non-abrasive areas. May also be used in moist and oily environments.

- Non-abrasive manufacturing
- Retail
- Distribution

▶ **Non-slip properties:**

- Very good (R11/V10 [DIN 51130])

▶ **Color:**


- Black

▶ **Standard sizes (±3%):**

- 2', 3' and 4' wide in length increments of 1' between 3' and 60'

▶ **Custom sizes:**

- We can supply any size or shape that you may require.



▶ **Edge:**

- Beveled on all sides unless otherwise specified

▶ **Warranty:**

- The ERGOMAT® 100 is guaranteed against wear for three years continuous usage in dry, non-abrasive environments.* It will not lose its elasticity and will provide continuous ergonomic benefits.

ERGOMAT®
Exceptional anti-fatigue matting

Latta Equipment Company, Inc.

15105-D John Delany Dr. #342
Charlotte, NC 28277

Phone: 704-752-7944

Fax: 704-542-9093

E-Mail: info@lattaequipment.com

Web Site: www.lattaequipment.com

