


# ERGOMAT® STANDARD

Outstanding benefits from the best polyurethane anti-fatigue mat on the market.

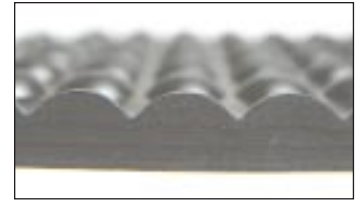

## ► Chemical resistance:

- Good – occasional exposure only. We will be happy to provide samples for your own tests.\*
- For areas where chemical resistance is of primary importance, we recommend our ERGOMAT F-MAT, ERGOMAT SOFTLINE and ERGOMAT NITRIL mats.\*
- The ERGOMAT should not be used in wet areas. It is not suited where cutting oil is present but will withstand petroleum based oils.

## ► Cleaning:

- Sweep or vacuum as appropriate. The ERGOMAT may be hosed down or easily washed with a string mop if necessary.
- ERGOMOP™ – Designed to clean the ERGOMAT primarily in cleanroom environments. May be used wet or dry.



## ► Weight:

- 1 pound per square foot

## ► Specialty applications

- Cleanrooms: Class 100 (Fed. Sys. No. 209D)
- Static control: The ERGOMAT is static dissipative per EOS/ESD DS-7.1 1994
  - point to point resistance  $1.2 \times 10^9$  ohm (typical)
  - resistance to groundable point  $1.6 \times 10^9$  ohm (typical)

## ► Raw material:

- Polyurethane – freon free

## ► Thickness:

- 5/8"

## ► Temperature range:

- Constant: Minimum 32°F – Maximum 175°F
- Briefly: 250°F

## ► Optional equipment:

- Non-slip backing for polished floors or carpet
- Grommet for hanging smaller mats
- Ground cord
- Ground cord snap

\* **Contact Latta for details.**

Please note that while the right mat can reduce the risk of slips and falls, no product can guarantee that accidents won't happen. Suitability to task in all aspects must be determined by you, the end-user, and Latta Equipment accepts no responsibility for damages involving the use of this product.

## ► Primary usage areas:

- All dry, non-abrasive manufacturing areas
- Warehouses and shipping areas
- Laboratories
- Airports
- Retail

## ► Non-slip properties:

- Very good (R11/V10 [DIN 51130])

## ► Color:


- Gray
- Optional light gray (not available for static control purposes)
- Custom colors possible in volume

## ► Standard sizes (±2%):

- 2', 3' and 4' wide in length increments of 1' between 3' and 60'

## ► Custom sizes:

- We will supply any size or shape that you may require.



## ► Edge:

- Beveled unless otherwise specified

## ► Warranty:

- The ERGOMAT® STANDARD is guaranteed against wear for eight years continuous usage in non-abrasive and dry environments. It will not lose its elasticity and will provide continuous ergonomic benefits.\*

**ERGOMAT®**  
Exceptional anti-fatigue matting

Latta Equipment Company, Inc.  
15105-D John Delaney Dr. #342  
Charlotte, NC 28277

Phone: 704-752-7944

Fax: 704-542-9093

E-Mail: [info@lattaequipment.com](mailto:info@lattaequipment.com)

Web Site: [www.lattaequipment.com](http://www.lattaequipment.com)

